
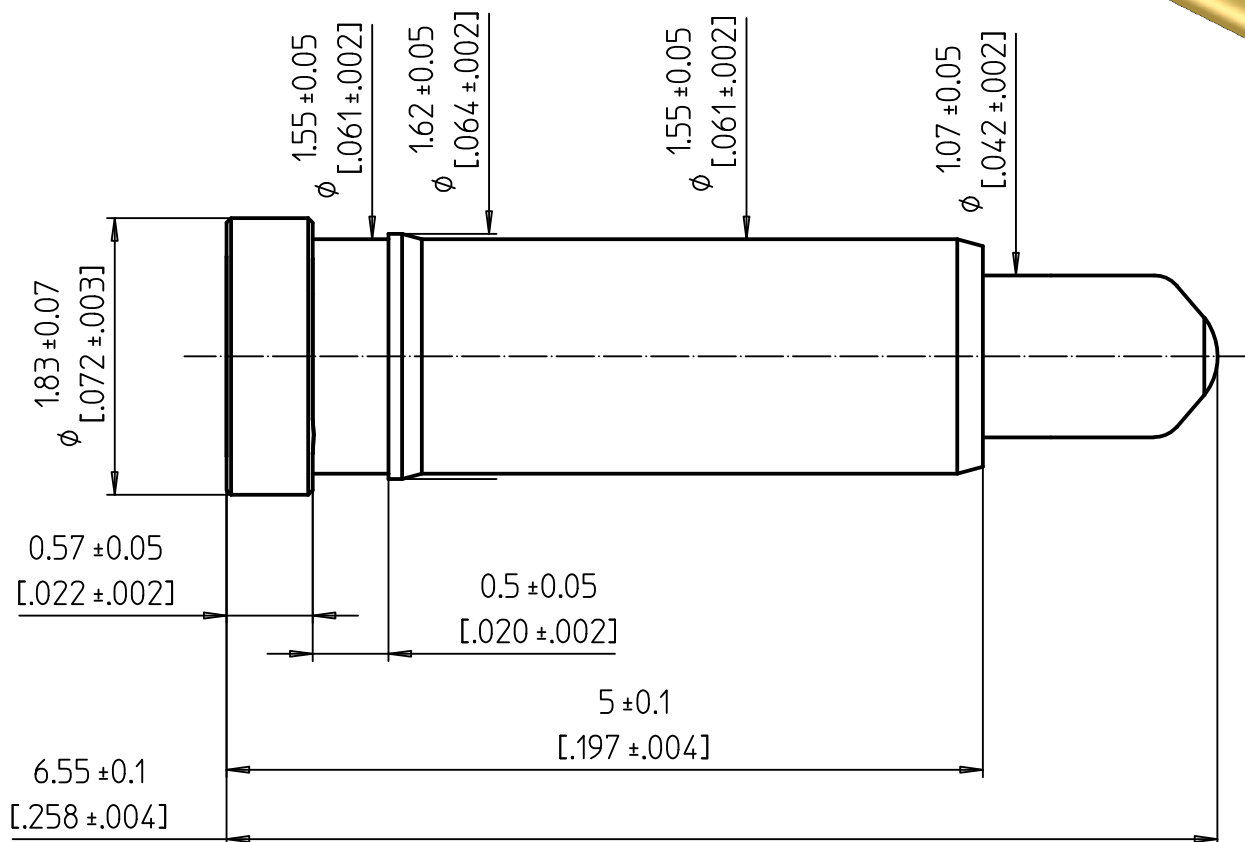
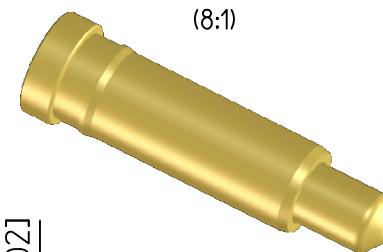


Spring Loaded Contacts With PRECI-DIP Integrated CLIP

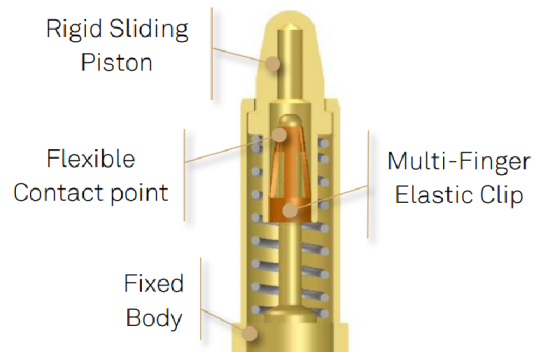

NOTES:

MECHANICAL REQUIREMENTS:

Durability: 20'000 cycles
Working stroke between H1 and H2 : S= 1.20 mm [0.47"]
Spring forces (F):
Finit= 0.50 N at Hinit= 6.55 mm [257"]
F1= 0.57 N at H1= 6.35 mm [250"]
Fnom= 0.82±0.15 N at Hnom= 5.75 mm [226"]
F2= 1.0 N at H2= 5.15 mm [202"]

Forces are measured in mean value of compression / decompression

ELECTRICAL REQUIREMENTS:

Contact resistance:
R= 30 mOhms max in static mode at Hnom
Current per individual contact in free air at ambient temperature:
ICont= 5 A at Hnom with temperature raise max 30°C

ENVIRONMENTAL REQUIREMENTS:

Operating temperature: -25 °C / +125 °C
Storage temperature: -40 °C / +125 °C
Relative humidity: 5% / 95%

MATERIALS / PLATINGS:

Contact interfaces plated with 0.5 µm [20µ"] gold over Nickel
Spring: Stainless steel
Clip : Beryllium Copper

SOLDERING :

Recommended PCB pad size : 2.0 mm [0.78"]
Solderability J-STD-002A, Test A 245°C, 5s, solder alloy SnAg3.8Cu0.7
Resistance to soldering heat J-STD-020C, 260°C, 20S

INSULATOR :

If assembling pin into moulding :
Recommended hole size : Ø1.58 [0.62"]

Series 0900-CLIP
High Reliability
Spring Loaded Contact



preci-dip
swiss world connects



90642-AS // 0907-0-CLIP

Remplacé par:

25:1

Dessiné

21.04.2022

C.Bidault

Contrôlé

N° dessin

0907-0-CLIP